

# Bryan "Flexible Water Tube" RV Series Steam Boilers

2,000,000 to 8,000,000 BTUH  
Forced draft gas, oil or dual fuel fired



# BRYAN BOILERS

*Originators of the "Flexible Water Tube" design*



*Performance efficiency breakthrough for commercial/industrial applications*

- True “flexible water tube” design
- High quality steam for heat or process
- Pressurized firing for high efficiency
- Full 5 sq ft per BHP heating surface area

## Quality Construction Features

**A** Heavy steel boiler frame, built and stamped in accordance with the appropriate ASME Boiler Code.

**B** Extra large drum with high steam release area ensures stable water level and dry steam.

**C** Large volume water leg downcomers promote rapid internal circulation for efficient heat transfer.

**D** Bryan bent water tubes are flexible, individually replaceable without welding or rolling.

**E** Water cooled furnace with low heat release.

**F** Water and steam side interior accessible for cleanout and inspection, front and rear openings, upper and lower drum.

**G** Pressurized design: Inner fire-side casing constructed of heavy gauge steel, completely seal welded, lined with high temperature insulation and refractory.

**H** Boiler tube and furnace area access panels; Heavy gauge steel lined with high temperature insulation and refractory, bolted and tightly sealed to boiler frame.

**I** Access panel: Front panels provide easy access for inspection, cleaning and access to burner head.

**J** Single side access: Combustion chamber, tubes and burner head are completely accessible from

one side, simplifying maintenance, minimizing floor space.


**K** Heavy gauge steel boiler jacket with rust resistant zinc coating and enamel finish. Insulated with fiberglass to ensure exceptionally cool outer surface.

**L** Minimum sized flue vent.

**M** Rear flame observation port.

**N** Forced draft, flame retention head type burner. Efficient combustion of oil or gas, quiet operation.

**O** Control panel: All controls installed and connected to terminal strip.

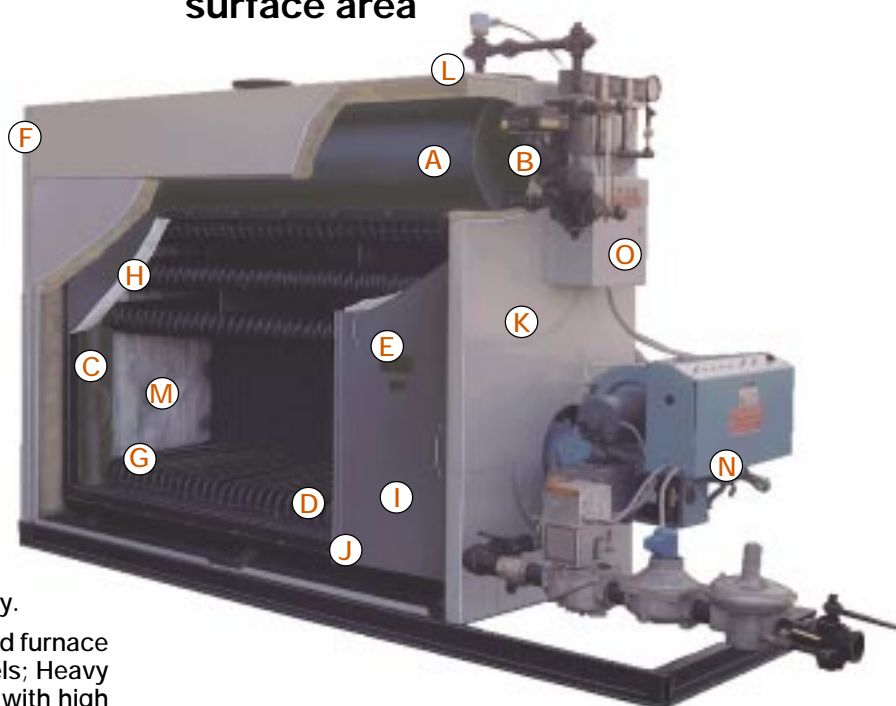

## Bryan RV Series Boiler Specifications

BOILER MODEL NUMBER	INPUT MBH (KW)	NOMINAL OUTPUT		STEAM OUTPUT LBS/HR**	HEATING SURFACE SQ. FT. (M²)	APPROXIMATE SHIPPING WEIGHT LBS (KG)
		MBH (KW)*	BHP*			
RV200-S	2000 (586.0)	1600 (468.8)	48	1649	240 (22.3)	5,190 (2355)
RV250-S	2500 (732.5)	2000 (586.0)	60	2061	299 (27.8)	5,810 (2637)
RV300-S	3000 (879.0)	2400 (703.2)	72	2474	365 (33.9)	6,745 (3061)
RV350-S	3500 (1025.5)	2800 (820.4)	84	2886	419 (38.9)	7,110 (3227)
RV400-S	4000 (1172.0)	3200 (937.6)	96	3298	490 (45.5)	8,170 (3708)
RV450-S	4500 (1318.5)	3600 (1054.8)	108	3710	544 (50.5)	8,540 (3876)
RV500-S	5000 (1465.0)	4000 (1172.0)	120	4122	597 (55.4)	9,650 (4380)
RV550-S	5500 (1611.5)	4400 (1289.2)	131	4535	668 (62.0)	10,175 (4618)
RV600-S	6000 (1758.0)	4800 (1406.4)	143	4947	722 (67.1)	11,175 (5072)
RV700-S	7000 (2051.0)	5600 (1640.8)	167	5771	847 (78.7)	12,740 (5782)
RV800-S	8000 (2344.0)	6400 (1875.2)	191	6596	972 (90.3)	14,295 (6488)

NOTES: \* Nominal output based on boiler industry standard of 80% of input. Actual combustion efficiencies will be higher and fuel dependent.  
\*\*LBS steam per hour from and at 212°F.

# Guaranteed high efficiency performance and easy maintenance ensure low cost operation

## All Bryan RV Series steam boilers offer these operating and performance features

### Guaranteed efficiency

The breakthrough in water tube boiler design that produced the RV Series provides operating efficiency so reliable, we guarantee it to be 82%\* or better.

### The Bryan Flexible Tube

The Bryan "Flexible Tube" design promotes high velocity internal circulation, aiding in high heat transfer and boiler efficiency. Tubes are easily removable and replaceable, without welding or rolling, eliminating expensive and long "down-time" for repairs even if required.

### Compact design, minimum floorspace

With our compact water tube design, the overall size of the unit is less than most other types of boilers, yet maintains a full five square feet of heating surface area per HP. Needing only 32" for tube removal, and on only one side of the boiler, the RV Series boiler occupies very little space in the boiler room. This can result in considerable savings in building costs. Pressurized firing permits minimum sized breaching and vent.

### Positive internal circulation

Each pass of the Bryan water tube slopes upward. This configuration, along with the large volume downcomer water legs, provides extremely rapid natural thermal internal circulation, promoting both high efficiency of heat transfer and uniform temperature throughout the boiler.



### Multi-pass flue gas travel

High velocity four-pass flue gas travel is obtained by a unique baffling system. This contributes to maximum fire side heat transfer and overall high boiler efficiencies.

### Accessibility of furnace and tube area


One hinged inner panel provides easy and complete access to furnace and boiler tube area, as well as to burner head. Other tube side panels are also removable, and all panels are heavily insulated and sealed to boiler frame. All access is from only one side.

### Large steam drum

The steam drum has generous water volume and steam release area. This design, along with effective drum internal functions, results in a stable water level and produces extremely dry steam at all load conditions.

### Water cooled furnace

The configuration of the water tubes provides a water cooled combustion chamber. A high percentage of the heating surface is exposed to direct radiant heat, increasing water velocities and heat transfer.

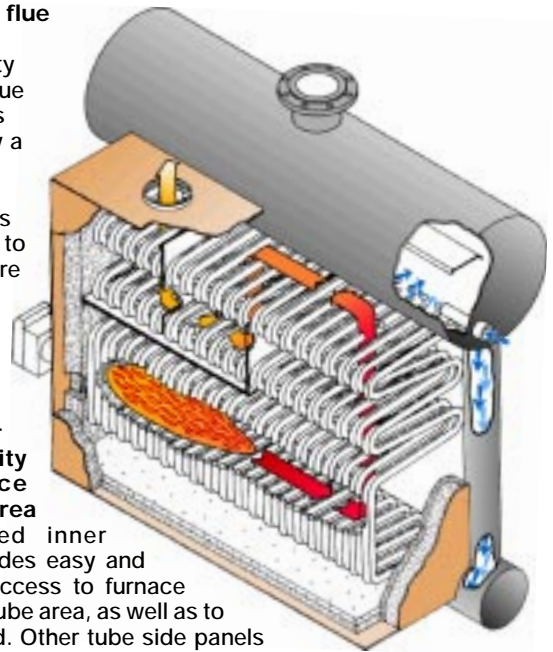

\* 15 psi steam.

## Bryan RV Series Boilers Standard and Optional Equipment

### STANDARD EQUIPMENT FURNISHED

#### Gas fired, forced draft

Combination low water cutoff and pump control, auxiliary low water cutoff, high limit pressure control, ASME-rated safety valve, water glass set, electronic combustion safety control, automatic operating gas valve, safety gas valve, pilot solenoid valve, pilot ignition assembly, main manual shutoff valve, pilot cock, pilot and main gas pressure regulators, air safety switch, steam pressure gauge, steam pressure control, heavy gauge jacket with heavy fiberglass insulation, all controls mounted and wired to terminal strip.

#### Oil fired, forced draft

Combination low water cutoff and pump control, auxiliary low water cutoff, high limit pressure control, ASME-rated safety valve, water glass set, electronic combustion safety control, oil valve, oil ignition transformer, two-stage fuel unit, oil nozzle assembly, steam pressure gauge, steam pressure control, heavy gauge jacket with heavy fiberglass insulation, all controls mounted and wired to terminal strip.

trol, oil valve, oil ignition transformer, two-stage fuel unit, oil nozzle assembly, steam pressure gauge, steam pressure control, heavy gauge jacket with heavy fiberglass insulation, all controls mounted and wired to terminal strip.

#### Combination gas-oil forced draft

Combination low water cutoff and pump control, auxiliary low water cutoff, high limit pressure control, ASME-rated safety valve, water glass set, electronic combustion safety control, automatic operating gas valve, safety gas valve, pilot solenoid valve, pilot ignition assembly, main manual gas shutoff valve, pilot cock, pilot and main gas pressure regulators, air safety switch, manual fuel selector switch, oil valve, two-stage fuel unit, oil nozzle assembly, steam pressure gauge, steam pressure control, heavy gauge jacket with heavy fiberglass insulation, all controls mounted and wired to terminal strip.

### OPTIONAL EQUIPMENT, EXTRA COST

- [1] Manual reset high limit control, installed


- [2] Auxiliary reset low water cutoff
- [3] Alarm bells or horns
- [4] FM, IRI, CSD-I or other insurance approved control systems
- [5] Indicating lights, as desired
- [6] Air atomizing oil burner
- [7] Lead-lag systems for two or more boilers
- [8] Draft control system
- [9] Oxygen trim system
- [10] Low NO<sub>x</sub> package

### When ordering, please specify:

- [1] Electric power voltage, phase and frequency
- [2] Boiler relief valve setting
- [3] Type of gas, BTU content, specific gravity and pressure available
- [4] Optional extra equipment or construction
- [5] Special approvals required (FM, IRI or other)
- [6] Altitude



# Bryan RV Series Steam Heating/Processing Boilers

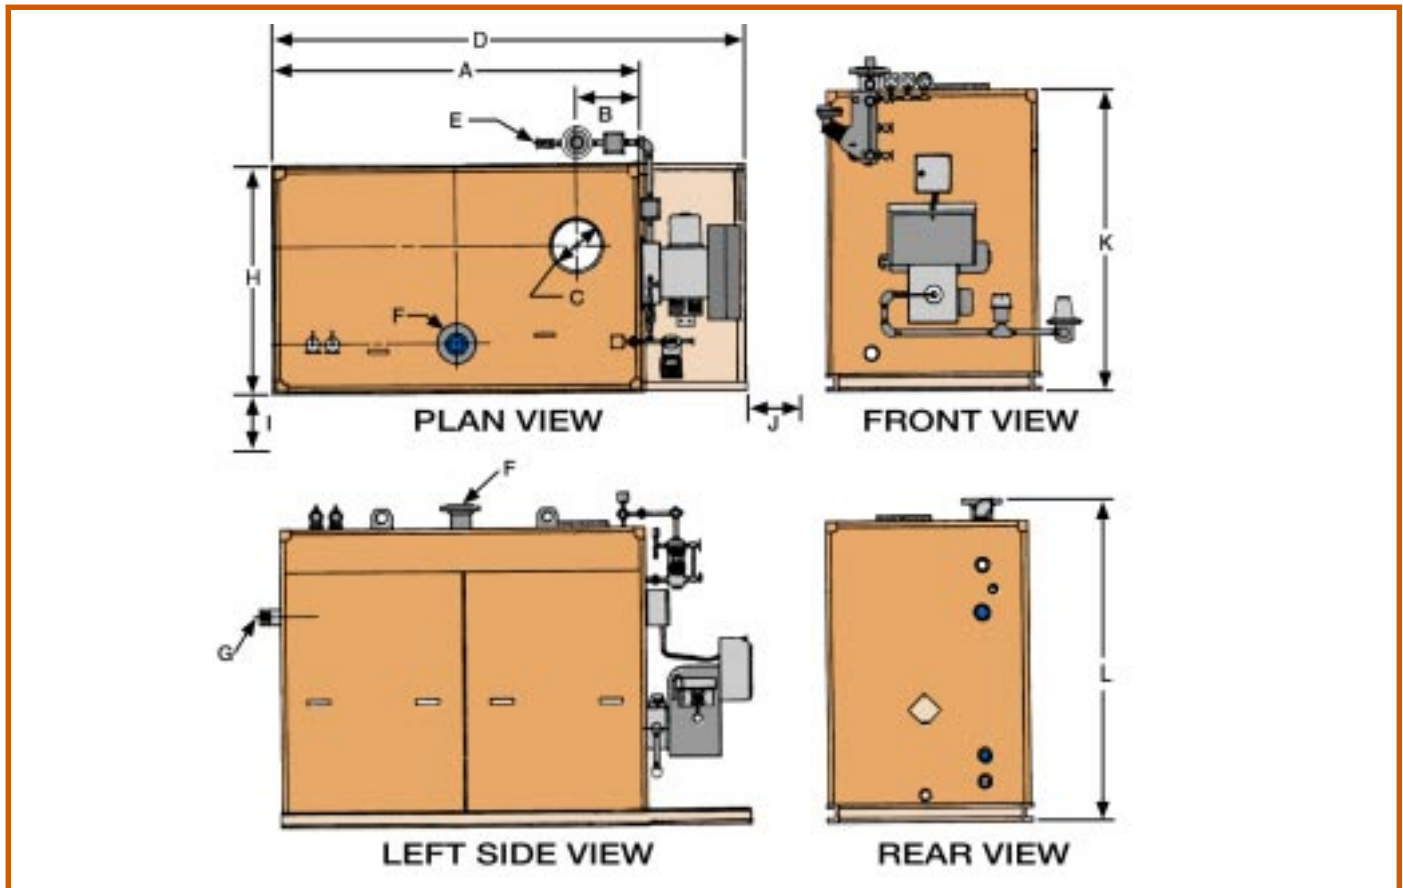

DIMENSIONS (in inches)

Boiler Model Number	A	B	C	D	E	F		G	H	I	J	K	L
	Length of Jacket	Flue Location	Flue Size	Overall Length	Gas Train Connection (Approx.)	15 psi	150 psi	Return Conn.	Width Outside Jacket	Min. Tube Removal Clearance	Clearance for Servicing Burner	Height Over Jacket	Floor to Flow Nozzle
RV200-S	66 (167.64)	12 <sup>1</sup> / <sub>2</sub> (31.75)	10 (25.40)	98 <sup>1</sup> / <sub>4</sub> (249.56)	1 <sup>1</sup> / <sub>2</sub> (3.81)	6 (15.24)	4 (10.16)	2 (5.08)	55 (139.70)	32 (81.28)	48 (121.92)	100 <sup>1</sup> / <sub>4</sub> (254.64)	104 <sup>3</sup> / <sub>4</sub> (266.1)
RV250-S	75 <sup>1</sup> / <sub>2</sub> (191.77)	13 <sup>1</sup> / <sub>4</sub> (33.66)	12 (30.48)	108 <sup>1</sup> / <sub>4</sub> (274.96)	2 (5.08)	6 (15.24)	4 (10.16)	2 (5.08)	55 (139.70)	32 (81.28)	48 (121.92)	100 <sup>1</sup> / <sub>4</sub> (254.64)	104 <sup>3</sup> / <sub>4</sub> (266.1)
RV300-S	88 <sup>1</sup> / <sub>2</sub> (224.79)	16 <sup>1</sup> / <sub>4</sub> (40.28)	12 (30.48)	121 (307.34)	2 (5.08)	6 (15.24)	4 (10.16)	2 (5.08)	55 (139.70)	32 (81.28)	48 (121.92)	100 <sup>1</sup> / <sub>4</sub> (254.64)	104 <sup>3</sup> / <sub>4</sub> (266.1)
RV350-S	98 (248.92)	16 (40.64)	16 (40.64)	130 <sup>1</sup> / <sub>2</sub> (331.47)	2 <sup>1</sup> / <sub>2</sub> (6.35)	6 (15.24)	4 (10.16)	2 (5.08)	55 (139.70)	32 (81.28)	48 (121.92)	100 <sup>1</sup> / <sub>4</sub> (254.64)	104 <sup>3</sup> / <sub>4</sub> (266.1)
RV400-S	111 (281.94)	18 <sup>3</sup> / <sub>4</sub> (47.63)	16 (40.64)	143 <sup>1</sup> / <sub>2</sub> (364.49)	2 <sup>1</sup> / <sub>2</sub> (6.35)	8 (20.32)	6 (15.24)	2 (5.08)	55 (139.70)	32 (81.28)	48 (121.92)	100 <sup>1</sup> / <sub>4</sub> (254.64)	104 <sup>3</sup> / <sub>4</sub> (266.1)
RV450-S	120 <sup>1</sup> / <sub>2</sub> (306.07)	18 <sup>3</sup> / <sub>4</sub> (47.63)	16 (40.64)	153 <sup>1</sup> / <sub>4</sub> (389.26)	2 (5.08)	8 (20.32)	6 (15.24)	2 (5.08)	55 (139.70)	32 (81.28)	48 (121.92)	100 <sup>1</sup> / <sub>4</sub> (254.64)	104 <sup>3</sup> / <sub>4</sub> (266.1)
RV500-S	130 <sup>1</sup> / <sub>4</sub> (330.84)	18 <sup>3</sup> / <sub>4</sub> (47.63)	16 (40.64)	163 (414.02)	2 (5.08)	8 (20.32)	6 (15.24)	2 (5.08)	55 (139.70)	32 (81.28)	48 (121.92)	100 <sup>1</sup> / <sub>4</sub> (254.64)	104 <sup>3</sup> / <sub>4</sub> (266.1)
RV550-S	143 <sup>1</sup> / <sub>4</sub> (363.83)	18 <sup>3</sup> / <sub>4</sub> (47.63)	16 (40.64)	175 <sup>3</sup> / <sub>4</sub> (446.41)	2 <sup>1</sup> / <sub>2</sub> (6.35)	10 (25.40)	6 (15.24)	2 (5.08)	55 (139.70)	32 (81.28)	48 (121.92)	100 <sup>1</sup> / <sub>4</sub> (254.64)	104 <sup>3</sup> / <sub>4</sub> (266.1)
RV600-S	152 <sup>3</sup> / <sub>4</sub> (387.99)	18 <sup>3</sup> / <sub>4</sub> (47.63)	16 (40.64)	185 <sup>1</sup> / <sub>4</sub> (470.54)	2 <sup>1</sup> / <sub>2</sub> (6.35)	10 (25.40)	6 (15.24)	2 (5.08)	55 (139.70)	32 (81.28)	48 (121.92)	100 <sup>1</sup> / <sub>4</sub> (254.64)	104 <sup>3</sup> / <sub>4</sub> (266.1)
RV700-S	175 <sup>1</sup> / <sub>2</sub> (445.14)	20 <sup>3</sup> / <sub>4</sub> (52.71)	20 (50.80)	214 <sup>1</sup> / <sub>2</sub> (544.83)	2 <sup>1</sup> / <sub>2</sub> (6.35)	10 (25.40)	6 (15.24)	2 (5.08)	55 (139.70)	32 (81.28)	48 (121.92)	100 <sup>1</sup> / <sub>4</sub> (254.64)	104 <sup>3</sup> / <sub>4</sub> (266.1)
RV800-S	197 <sup>3</sup> / <sub>4</sub> (502.29)	20 <sup>3</sup> / <sub>4</sub> (52.71)	20 (50.80)	237 <sup>1</sup> / <sub>4</sub> (602.62)	2 <sup>1</sup> / <sub>2</sub> (6.35)	10 (25.40)	6 (15.24)	2 (5.08)	55 (139.70)	32 (81.28)	48 (121.92)	100 <sup>1</sup> / <sub>4</sub> (254.64)	104 <sup>3</sup> / <sub>4</sub> (266.1)

Specifications subject to change without notice. Consult factory to consult on other boiler options.



Since 1916 • Subsidiary of Bryan Steam Corporation  
P.O.Box 27, Peru, Indiana 46970-0027 U.S.A.  
Phone: 765-473-6651 • Internet: [www.bryanboilers.com](http://www.bryanboilers.com)  
Fax: 765-473-3074 • E-mail: [bryanboilers@iquest.net](mailto:bryanboilers@iquest.net)